



Fingerprint door lock solution album

## Features & Benefits:

### Humanized push-pull design

After fingerprint recognition, you can open the door lightly. One step is enough!

### User friendly access

Ilockey F8 has four access solutions, fingerprint, Pincode, Mifare card and mechanical key for your option.

### Blind fingerprint recognition

The fingerprint sensor is hidden behind the front handle, effectively increasing safety and service life

### Anti-peeping password design

You can enter the anti-peeping code before and after the correct password. to avoid awkward in front of your friends.

### Automatic mortise lock

Closed automatically locked, indeed closed and going. If the bolt is not entirely stretched, the lock will be alarmed.

### Fast escape function


One button for emergency escape for emergency situation.

### Emergency USB power supplier

In case the battery has no power, you can unlock it with power bank.



Mode No: F8

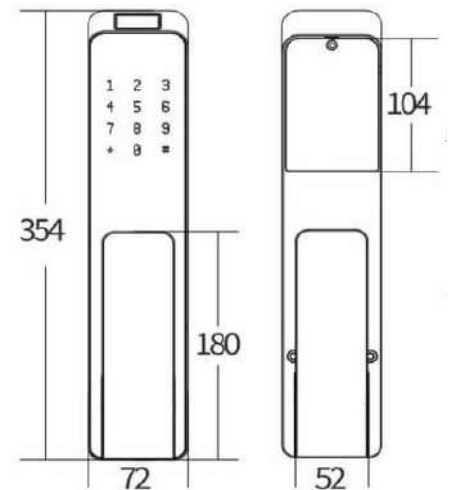

Measurement

<b>Spec info</b>	Power supply	4 AA batteries	Fingerprint	100 group
	Static current	≤25μA	Digital	10 group
	Dynamic current	≤200mA	Card	100 group
	Working temperature	"-10 ~ +60℃	Battery life	8000 times
	Working humidity	20 ~ 95%RH	Net weight	7kg
	Alarm voltage	4.8±0.2V	Door thickness	40--110mm

## Features & Benefits:

### Curved SUS304 and Acrylic plane design

Simple and elegant design, it is more than quality, it is an experience!

### User friendly access

Ilokey IF406 has four access solutions, fingerprint, Pincod, Mifare card and mechanical key for your option.

### Semi-conductor fingerprint sensor

Semi-conductor fingerprint sensor is used to avoid unlocking by false fingerprint.

### Anti-peeping password design

you can enter the anti-peeping code before and after the correct password. to avoid awkward in front of your friends.

### Reversible for the left or right handle/mortise

The user can adjust the fingerprint lock handle direction according to the door opening station.

### Fast escape function


One button for emergency escape for emergency situation.

### Emergency USB power supplier

In case the battery has no power, you can unlock it with power bank.



Mode No: IF406

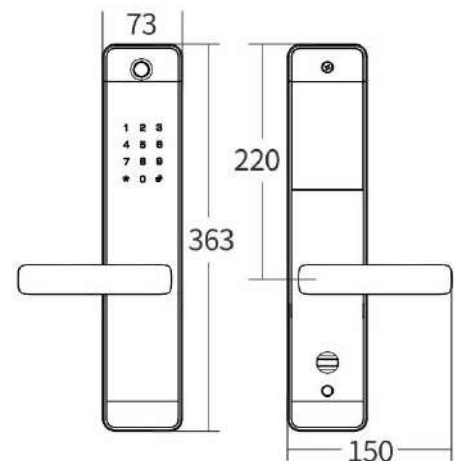

Measurement

<b>Spec info</b>	Power supply	4 AA batteries	Fingerprint	300 group
	Static current	≤25μA	Digital	
	Dynamic current	≤200mA	Card	
	Working temperature	"-10 ~ +60°C	Battery life	8000 times
	Working humidity	20 ~ 95%RH	Net weight	5kg
	Alarm voltage	4.8±0.2V	Door thickness	40--110mm

## Features & Benefits:

### F-Touch Fingerprint, iPhone level unlock

Hold it open and subvert your unlocking experience.

### User friendly access

Ilokey IF416 has four access solutions, fingerprint, Pincod, Mifare card and mechanical key for your option.

### Lock+Door bell

Unique design, completed with door bell function, one lock for two purposes.

### Anti-peeping password design

you can enter the anti-peeping code before and after the correct password. to avoid awkward in front of your friends.

### Smart Voice Navigation + OLED display

Leading OLED display  
quick voice navigation steps  
to guide the correct use.

### Fast escape function


One button for emergency escape for emergency situation.

### Emergency USB power supplier

In case the battery has no power, you can unlock it with power bank.



Mode No: IF406

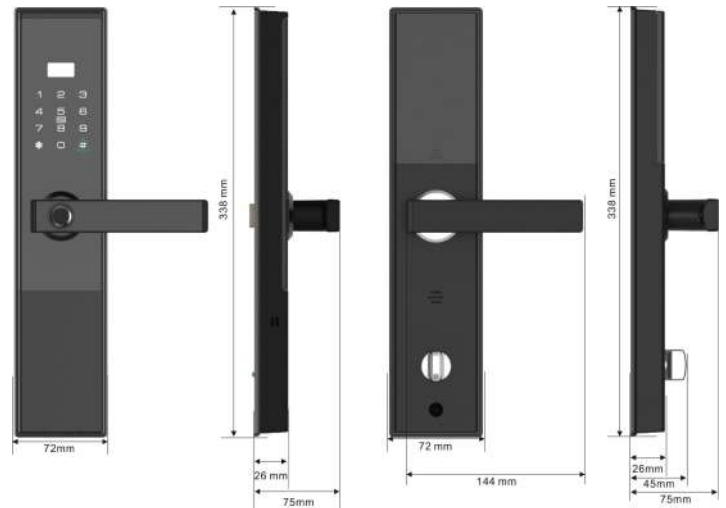

Measurement

<b>Spec info</b>	Power supply	4 AA batteries	Fingerprint	100 group
	Static current	≤25μA	Digital	20 group
	Dynamic current	≤200mA	Card	50 group
	Working temperature	"-10 ~ +60°C	Battery life	10,000 times
	Working humidity	20 ~ 95%RH	Net weight	5kg
	Alarm voltage	4.8±0.2V	Door thickness	40--110mm

## Features & Benifits:

### Classic Sliding door lock design

Unique design for sliding door and It is widely used in narrow frame.

### User friendly access

Ilockey F2 has four access solutions, fingerprint, Pincode, Mifare card and mechanical key for your option.

### Semi-conductor fingerprint sensor

Semi-conductor fingerprint sensor is used to avoid unlocking by false fingerprint.

### Anti-peeping password design

You can enter the anti-peeping code before and after the correct password. to avoid akward in front of your friends.

### Multiple mortise for choice

Both sliding door mortise and swing door mortise are available for choice according to different door types.

### Fast escape function


One button for emergency escape for emergency situation.

### Emergency USB power supplier

In case the battery has no power, you can unlock it with power bank.



Mode No:F2

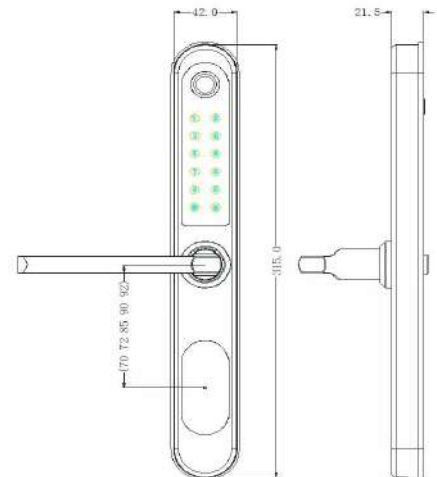

Measurement

<b>Spec info</b>	Power supply	4 AA batteries	Fingerprint	100 groups
	Static current	≤25μA	Digital	2 groups(one for program ,one for user)
	Dynamic current	≤200mA	Card	100 groups
	Working temperature	"-10 ~ +60°C	Battery life	10,000 times
	Working humidity	20 ~ 95%RH	Net weight	3.5kg
	Alarm voltage	4.8±0.2V	Door thickness	38--120mm

## Features & Benifits:

### Different pannel design

There are round, Square and long long design.  
They have covered all Euro rose type in the market.

### User friendly access

Ilokey F3R & F3S have Fingerprint, key and APP unlocking.  
F3L has fingerprint, pincode, APP and key unlocking

### Semi-conductor fingerprint sensor

Semi-conductor fingerprint sensor is used to  
avoid unlocking by false fingerprint.  
effectively increasing safety and service life

### Single latch

Single latch---easy to install or renovate,  
the knob lock mechanical lock could be  
upgraded without drilling any extra hole

### Fast installation

One screw driver with 10 minites  
The locking experience enter into new era.

### Passage mode

Passage mode and verify mode transfer freely  
according to your request.

### Emergency USB power supplier

In case the battery has no power,  
you can unlock it with power bank.



Mode No: F3R



Mode No: F3S



Mode No: F3L

<b>Spec info</b>	Power supply	4 AA batteries	Fingerprint	30 groups for lever, 100 pcs for F3L
	Static current	≤25μA	Digital	
	Dynamic current	≤200mA	App unlck	Bluetooth 4.0 later
	Working temperature	"-10 ~ +60°C	Battery life	10,000 times
	Working humidity	20 ~ 95%RH	Net weight	2.5kg
	Alarm voltage	4.8±0.2V	Door thickness	30--55mm

## Features & Benefits:

### Unique structure design

Tilted structure design for better view and convenient operation

### User friendly access

Ilokey MF8 has four access solutions, fingerprint, Pincod, Mifare card and mechanical key for your option.

### Deadbolt & Rim lock for option

Multiple choice for deadbolt and rim lockbody for option to meet your different door type requirement.

### Voice guidance

Voice whole navigation easy to operate.

### APP online trail

Every access and log can be controlled by Mobile APP.

### Anti-peeping password design


you can enter the anti-peeping code before and after the correct password. to avoid awkward in front of your friends.

### Emergency USB power supplier

In case the battery has no power, you can unlock it with power bank.



Mode No: IF406

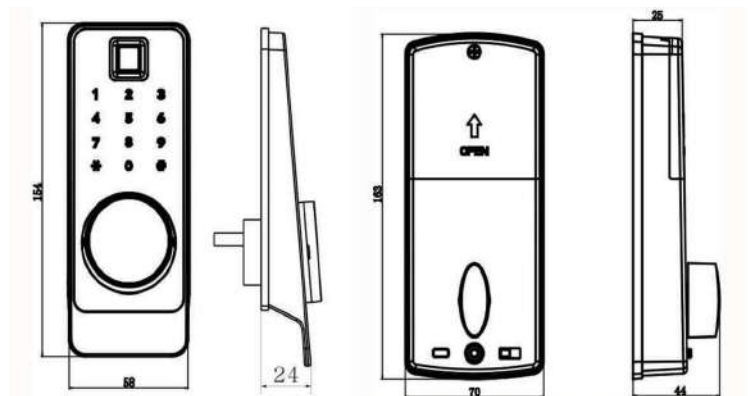

Measurement

<b>Spec info</b>	Power supply	4 AA batteries	Fingerprint	100 group
	Static current	≤25μA	Digital	10 group
	Dynamic current	≤200mA	Card	100 group
	Working temperature	"-10 ~ +60°C	Battery life	10,000 times
	Working humidity	20 ~ 95%RH	Net weight	1.5kg
	Alarm voltage	4.8±0.2V	Door thickness	40--110mm

## Features & Benefits:

### Visual display

Visual display operation of high-definition color screen.

### User friendly access

Ilokey G1 has four access solutions, fingerprint, Pincod, Mifare card and remote control for your option.

### One card for all solution

Support a variety of contactless mifare card.

### Anti-peeping password design

You can enter the anti-peeping code before and after the correct password. to avoid awkward in front of your friends.

### Human voice guidance

Voice whole navigation easy to operate.

### Safeguard


Enter the wrong password for 5 times continuously and the system is locked for one minute.

### Emergency USB power supplier

In case the battery has no power, you can unlock it with power bank.



Mode No:G1

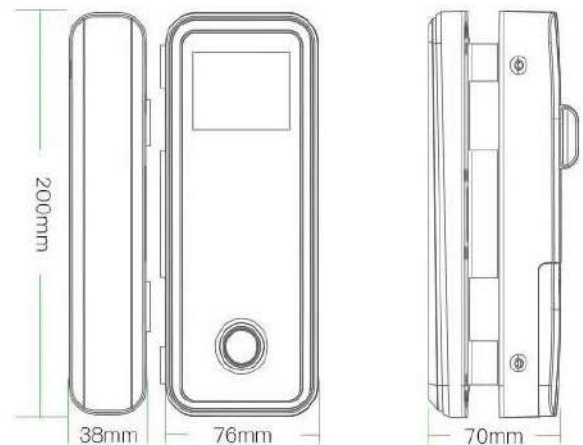

Measurement

<b>Spec info</b>	Power supply	4 AA batteries	Fingerprint	1000 group
	Static current	≤25μA	Digital	1000 group
	Dynamic current	≤200mA	Card	1000 group
	Working temperature	"-10 ~ +60°C	Battery life	10,000 times
	Working humidity	20 ~ 95%RH	Net weight	1.5 kg
	Alarm voltage	4.8±0.2V	Door thickness	10--12mm





Fashion life

Enjoy intelligence

ILOCKEY TECHNOLOGY CO.,LTD

Add: 6th Floor Shuipan building, No 3193 Binghe  
Avenue ,Futian District, Shenzhen

Tel:+86-755-84046958

Fax:+86-755-84046959

Email:info@ilockey.com

www.ilockey.com